

## Electro-Chemical Marking "Made in Germany"

- \* Electrolytic marking of metal items of different shapes and sizes with: letters and numbers, graphics, trade marks, scales, data and logos.
- \* Choice of light / dark markings, exact adjustment of the marking time.
- \* Suitable for small and mid-size series.
- \* End of marking time is indicated by an optical and acoustic signal.
- \* Versatile, sturdy and durable.
- \* Warranty period: 3 years.

*It's so simple and quick:  
Electrolytic marking on  
flat, convex, concave or  
round surfaces.*



*A class better!*




**New:**

- \* Controlled by micro-processor
- \* Illuminated, digital display of all parameters
- \* Electronic short-circuit protection


### Accessories For optimum results

#### Stencils



All phototechnical possibilities

#### Stamps



Shapes for almost all part geometries

#### Accessory set



#### Marking felt



To cut your own sizes  
375 x 500 mm  
Art.-No.: 22.150

#### Electrolyte



Application specific Electrolytes  
Art.-No.: 22.001  
to  
Art.-No.: 22.040

#### Neutralyte




With pH indicator  
Art.-No.: 22.102

#### Neutralyte dispenser



For fast, economic and clean after-treatment  
Art.-No.: 22.156

## Optional Accessories

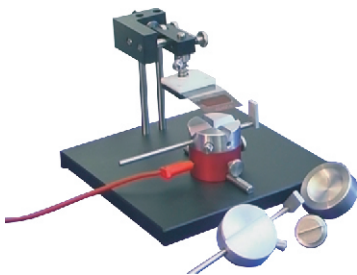

Art.-No.: 56.072

### **Workholding unit L1 for small series**

- \* **Exact alignment of the parts to the stencil**
- \* **For small series**
- \* **Accurate adjustment of the stencil**
- \* **Fast replacement of the jigs**



Art.-No.: 56.073

### **Etch-Station M1 with Electrolyte supply**

- \* **With automatic supply of Electrolyte**
- \* **For small and mid-size series**
- \* **Exact alignment of the workpiece to the stencil**
- \* **Accurate adjustment of the stencil**
- \* **Fast replacement of the jigs**

#### SIGNOMAT S200 - Technical Specifications

Dimensions W,H,D:	265, 95, 275 mm
Mains voltage:	115/230 V 50/60 Hz (automatic recognition)
Marking voltage:	12 V
Marking current:	3,3 A
Current types:	Light/Dark
Output:	40 VA
Weight:	4 kg
Noise level:	20 dB
Operation modes:	- manual stamp with automatic start-up - manual marking together with a foot switch